

COMPACT TRACK LOADER

# XC7-TV12



EU Stage V/EPA Tier IV

XCMG North America Corporation  
5145 Schirls Street, Las Vegas, NV 89118  
Email: [letsgo@xcmgusa.com](mailto:letsgo@xcmgusa.com)  
Phone: 725-605-2777  
Web: [www.xcmg-usa.com](http://www.xcmg-usa.com)





## INTRODUCTION OF XCMG

Founded in 1943, XCMG is a multinational corporation with the most comprehensive range of competitive, influential products in the construction machinery industry. Our business covers eight key areas: construction machinery, heavy trucks, mining machinery, sanitation machinery, machinery components, construction, finance, and the ICT industry.

XCMG has established a global R&D network with a total of six centers in China, the US, Germany, Brazil and India, with China national technology center at its core. In addition to a number of manufacturing bases in China, the US, Germany, the Netherlands, Poland, Austria, Brazil, India, and Uzbekistan, we possess two complete machine brands (XCMG, Schwing), and several component brands including FT, AMCA. It is the strength of this global R&D network and manufacturing operations that has made XCMG the industry leading global construction equipment manufacturer that it is today.



# OVERVIEW

## YANMAR ENGINE

The Yanmar engine provide a output 53.7kW/72hp With unmatched performance. The engine is EPA Tier 4 Final/EU Stage V certified.

## CAB

The machine is designed with ROPS/FOPS certified cab. Suspension seat provide greater comfort for the operator, EH Control is standard with ISO/H control mode.

## POWER TRAIN

The hydrostatic Transmission provides quick travel Response and aggressive drive. Two speed is standard With hydraulic released parking brakes

## Hydraulic System

Equipment with axial-piston hydrostatic pump minimizes Hydraulic loss for better fuel economy by delivering as much as flow as need. High flow and third function valve are standard for work tool attachments.

## VERSATILITY

The quick coupler and third function hydraulic are standard, can be easily and quickly switching between a range of attachments. Beside, the coupler is designed as ISO standard compatible with a wide range of attachments.



# Comfortable operation surrounding



## — All day long comfort

The spacious interior cab designed helps the operator comfortably and productively all the day. The suspension seat provides further comfortable and less fatigue environment. The pressurized cab provides cleaner and quieter working environment.

## — Four- season comfort

Air-conditioning is standard equipment on The TV12, the cab is designed with optimized Ducts and vents to maximize airflow. AD filter easily replaced.

## — Easy to operate

Joysticks are equipped with an in cab ISO/H pattern changeover.



## — High Resolution Machine Monitor

The color monitor can display working hour, temperature, fuel level, maintenance information and much other information.



# No Compromise On Safety

## — ROPS&FOPS Cab

ROPS and FOPS are standard equipment to protect the operator.



## — Rearview camera

The standard rearview camera allows increased surroundings detection and is easily viewed on the LCD screen.



## — Interlock System

A Triple interlock system provides increased safety and machine uptime.

# Maintenance



## — Ground level access

Ground level access to all maintenance points as well as remote filters for easy daily checks and maintenance.

## — Maintenance

The cab swings open more than 80 degrees, designed to easily replace or maintenance any internal components.





### — Quick Coupler and attachments

Our quick coupler is designed as ISO Standard which is widely used, the standard quick coupler allows one machine to use a series of attachments, give you business greater versatility. Compact track loaders are compatible with buckets, brooms, hydraulic hammers, augers, forks, bale huggers, dozer blades and other attachments.





# Technical Specifications

## ENGINE

Yanmar EU Stage V/ Tier 4 Final emissions certified	
Model	4TNV98CT-NTY
Type	Water-cooled, 4-cycle
Aspiration	Turbocharged & air-to-air intercooled
Number of cylinders	4
Displacement	3.319L
Gross power	53.7kW 2500r/min
Peak torque	269~291 N·m/1625±25 r/min
Fuel system	Direct injection
Air cleaner	dry type with double elements

## COOLING

Fan drive	Hydraulically driven
-----------	----------------------

## POWER TRAIN

The hydrostatic Transmission provides quick travel response and aggressive driven.		
Travel speed	Forward	Reverse
1st	8 km/h (5mile/h)	8 km/h (5mile/h)
2nd	14 km/h (8.75mile/h)	14 km/h (8.75mile/h)

## HYDRAULIC SYSTEM

System type	Variable driving and working hydraulic system,EH Joystick
Pump Flow, Standard	57 ml/r
Traveling pressure	35MPa
Raise time	≤5.5 s
Dump time	≤2 s
Lower time(empty)	≤3.5 s
Total cycle time	≤11 s

## ELECTRICAL

Voltage	12 V
Battery capacity	95AH
Alternator rating	12V/80A

## REFILL CAPACITY

Cooling system	40 L	10.57 gal
Fuel tank	105 L	27.74 gal
Engine oil	9.4 L	2.48 gal
Hydraulic tank	40 L	10.57 gal
Hydraulic system total	53 L	14.0 gal
Chain box, each side	/	/



## PERFORMANCE

Tipping load	≥3886kg	≥8549lb
Rated operating capacity	≥1360kg	≥2992lb
Boom breakout force	≥28KN	≥6300lbf
Bucket breakout force	≥33KN	≥7425lbf

## NOISE LEVEL

Inside cab	≤81dB
Outside cab	≤103dB

# Technical Specifications

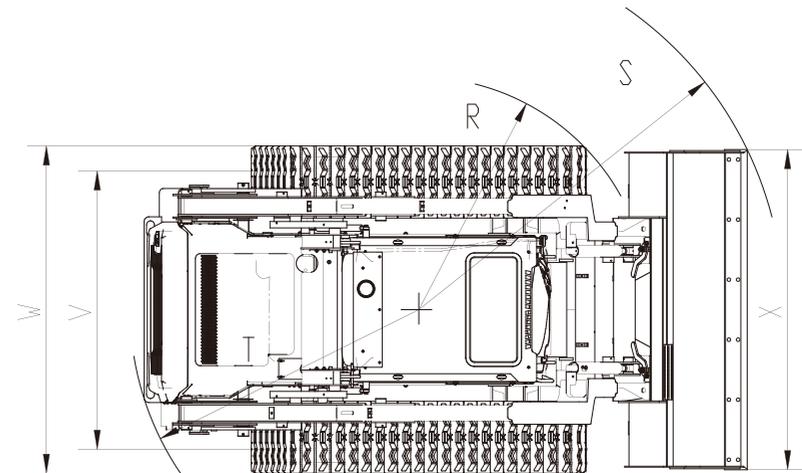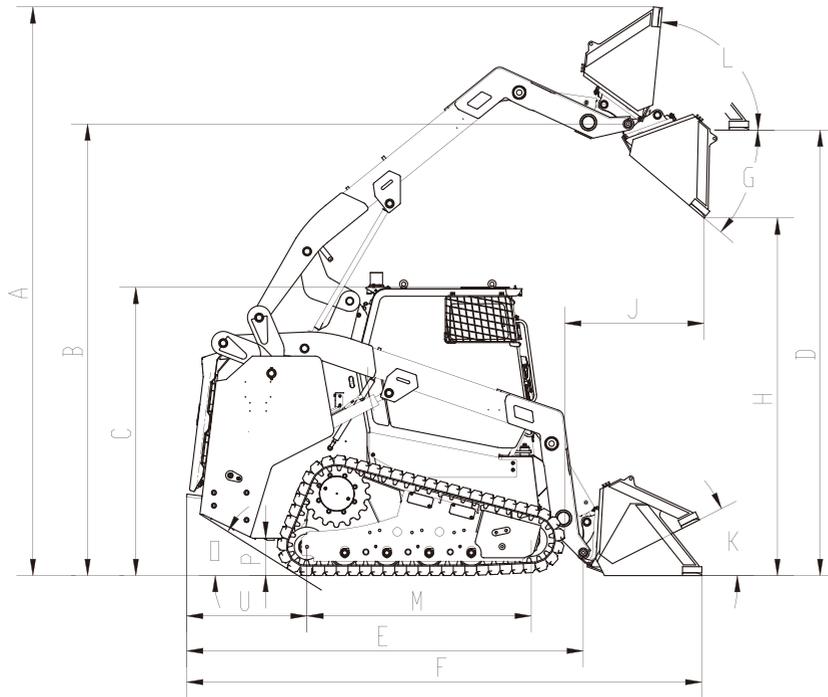

## DIMENSIONS

A Maximum overall height	4153 mm	13.62ft
B Height to hinge pin at maximum lift	3300 mm	10.82ft
C Height to top of cab	2100 mm	6.89ft
D Clearance bucket bottom to ground	3136 mm	10.29ft
E Length without bucket	2915 mm	9.56ft
F Length with bucket	3786 mm	12.42ft
G Dump angle (full lift height)	40°	40°
H Dump height at maximum lift and dump	2615 mm	8.58ft
K Bucket rollback at ground level	26°	26°
L Full rotation angle of bucket at the highest point	84°	84°
J Reach at maximum lift and dump	1025 mm	3.36ft

M Wheelbase	1640 mm	5.38ft
O Angle of departure	31°	31°
P Ground clearance	216 mm	0.71ft
R Front turning radius without bucket	1466 mm	4.81ft
S Front turning radius with bucket	2274 mm	7.46ft
T Rear turning radius	1809 mm	5.93ft
U Bumper overhang behind Rear Axle	885 mm	2.9ft
V Tread	1595 mm	5.23ft
W Width without bucket	2045 mm	6.71ft
X Width bucket	2000mm	6.56ft

# STANDARD EQUIPMENT

## ENGINE

Yanmar, EPA Final Tier 4/ EU Stage V emissions, 4 cylinder 4 stroke

Electronic injection system

Diesel Particulate Filter(DPF)

## COOLING

Hydraulically driven

## POWERTRAIN

Two speed travel

Hydrostatic transmission

Closed-center hydraulic

Hydraulic released parking brakes

## HYDRAULIC

Axial-piston hydrostatic pump

EH control

H/ISO mode joysticks

Third function valve standard

Standard hydraulic flow **25.1 GPM**

Maximum hydraulic flow **37.6 GPM**

## OPTIONAL EQUIPMENT

Ride control

Additional counterweight

## ELECTRIC

Four LED lights

Battery

Backup alarm

Electric horn

Rotating beacon

Front windshield wiper

## TRACK

450-86-56

## LINKAGE& ATTACHMENT

Vertical lift linkage

Quick coupler standard

ISO standard interface

## BUCKET

0.6m<sup>3</sup>(0.78yd<sup>3</sup>)

## CAB

ROPS/FOPS cab

Adjust seat with suspension

Armrest and control interlock

Air conditioning

Rearview mirror

Fire extinguisher

Retractable seat belt

Rearview camera

## OTHER

Hour meter

Voltage

Coolant temperature

Hydraulic oil level sight gauge

Coolant level sight gauge

Engine oil temperature

Engine oil pressure

Hydraulic oil temperature

# Optimum Services , XCMG Guaranteed



XCMG approved attachments



Genuine parts



Financial solutions



Maintenance contract





## Full Range of Services Ready for You

In order to respond to your needs as fast as possible, XCMG experts can be dispatched to your job site from a facility near you. A full range of services are available to reduce your total cost of ownership and increase your revenue.

## Professional Integrated Complete Solutions

XCMG group has built a strong reputation based on the quality, reliability and durability of its construction machinery. XCMG has established a world wide service and parts network to provide support to every customer regardless of location.

## XCMG Global Spare Parts System

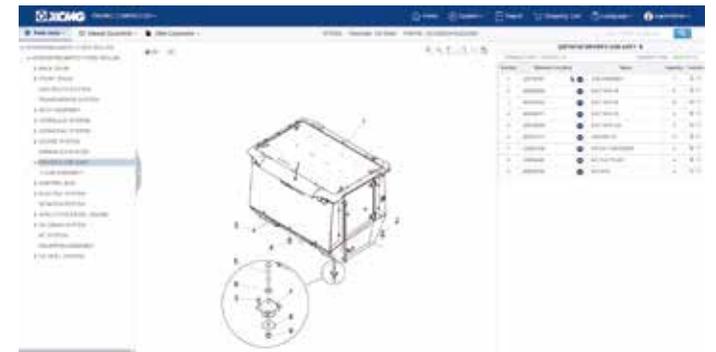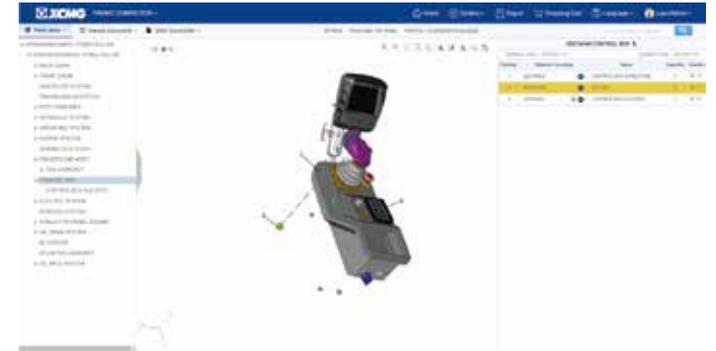

Mobile cranes



Excavators



Aerial work platforms



Wheel loaders



Road machinery



 **XCMG**

---

