

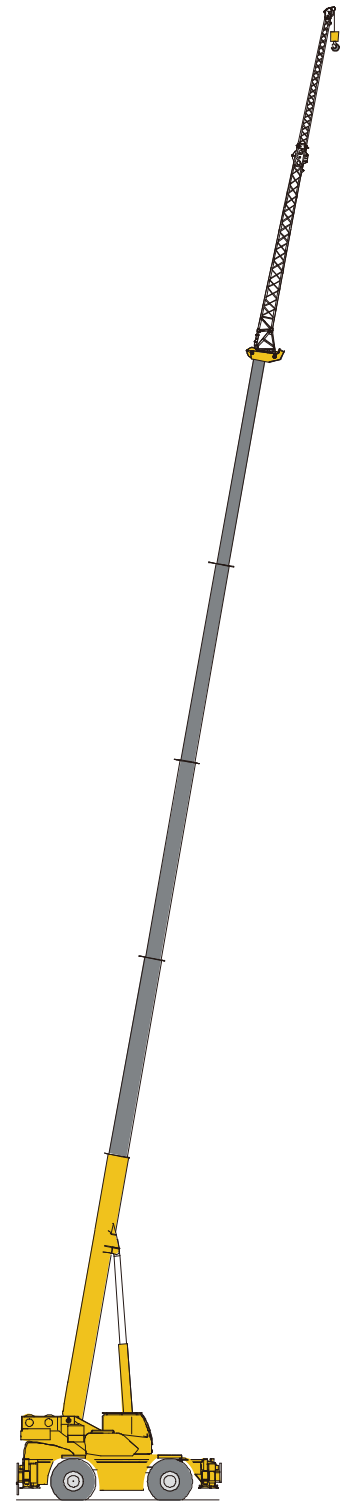
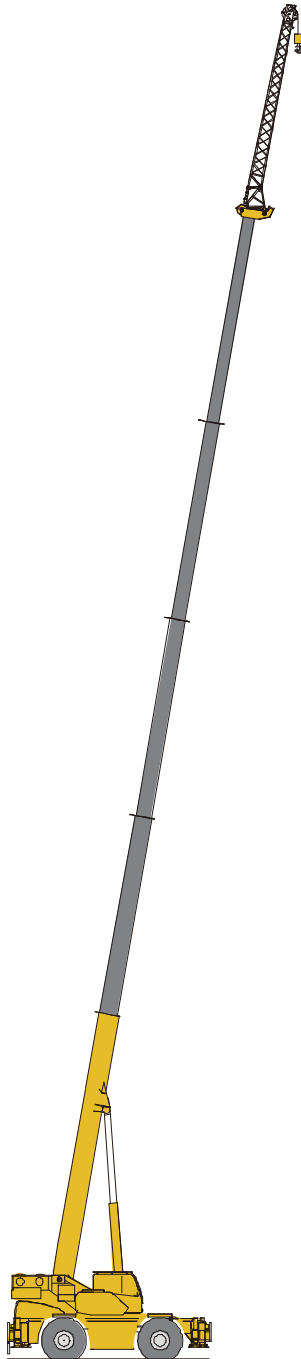


# BOOM / JIB COMBINATIONS




BOOM	BOOM + ONE JIB SECTION	BOOM + TWO JIB SECTIONS
40.7-157.4 ft (12.4-48 m)	157.4 + 34.4 ft (48 + 10.5 m)	157.4 + 57.4 ft (48 + 17.5 m)

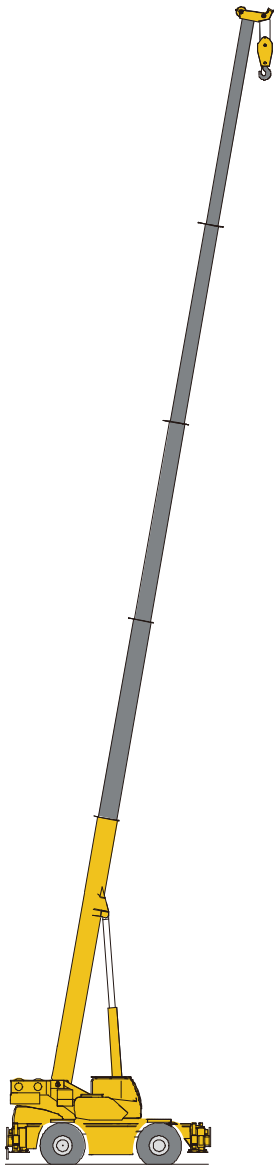

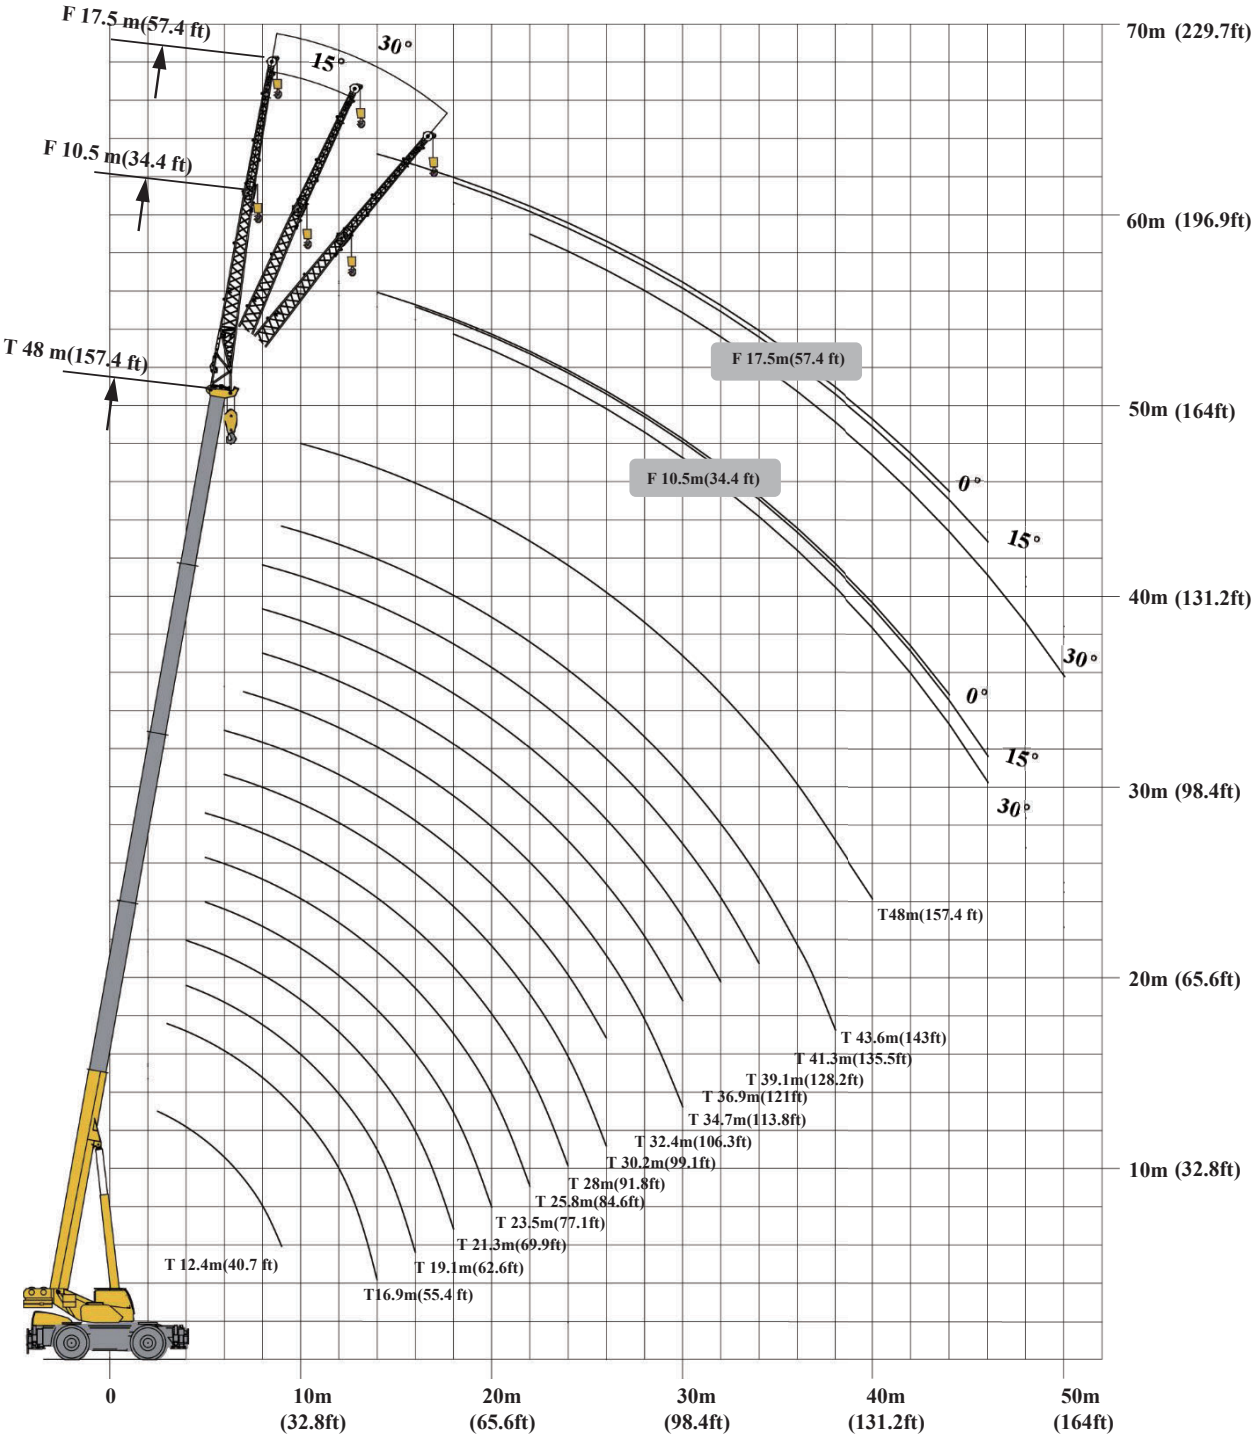

# LOAD CHARTS

**UNITS: t**  
**ASME B30.5 85%**





	12.4	16.9	19.1	21.3	23.5	25.8	28	30.2	32.4	34.7	36.9	39.1	41.3	43.6	48	
2.5	90.7*															2.5
3	80*	63.3														3
3.5	75.0	63.3														3.5
4	72.4	63.3	35.1	46.0												4
5	57.9	57.9	35.0	45.0	34.8	35.3	33.5									5
6	48.3	48.3	35.0	40.0	34.8	33.9	33.5	32.4	23.3							6
7	41.4	41	35.0	38.0	34.8	31.6	31.9	29.7	21.9	25.4						7
8	35.0	35	35.0	36.4	34.8	29.7	29.5	27.9	20.7	23.3	21.0	16.1	17.3			8
9	28.8	28	33.2	29.5	32.3	27.9	27.5	26.7	19.5	21.9	20.1	15.4	17.3	13.1		9
10		25.0	27.0	23.7	26.2	26.4	25.3	25.3	18.4	20.5	19.2	14.8	17.2	13.0	11.4	10
12		17.0	19.7	16.1	19.0	21.0	19.1	19.2	16.7	18.3	17.6	13.6	16.6	12.5	11.4	12
14			14.9	12.0	14.2	14.9	14.1	15.6	15.1	14.0	16.1	12.1	14.4	12.0	11.4	14
16				9.0	10.9	11.7	9.9	12.1	13.3	10.8	12.7	10.8	11.3	10.6	10.3	16
18					8.5	9.4	7.7	8.9	10.8	9.2	10.2	9.8	9.1	9.5	9.1	18
20						7.6	6.5	7.6	8.9	7.3	7.5	8.9	7.9	8.1	7.7	20
22							4.9	5.8	7.4	5.9	6.3	7.7	6.2	7.2	6.8	22
24								4.8	6.3	4.6	5.7	6.5	5.1	6.0	5.6	24
26								3.9	5.3	3.7	4.8	5.6	3.8	5.1	4.7	26
28										2.6	4.0	4.8	3.2	4.3	3.9	28
30										2	3.0	4.1	2.5	3.6	3.2	30
32												3.5	2	2.7	2.3	32
34													1.6	2.2	1.9	34
36														1.7	1.4	36
38														1.4	1	38
40															0.8	40

Notes: The lifting load with a \* followed is available only when additional equipment is used;  
When a load weighing more than 55 t(60 Ust) is lifted, a larger hook block is required for operation.

# ROUGH TERRAIN CRANE XCR100\_U

Reach That Matters

**UNITS: t**  
**ASME B30.5 85%**





	12.4	16.9	19.1	21.3	23.5	25.8	28	30.2	32.4	34.7	36.9	39.1	41.3	43.6	48	
2.5	90.7*															2.5
3	80*	63.3														3
3.5	75.0	63.3														3.5
4	72.4	63.3	35.1	46.0												4
5	57.9	57.9	35.0	45.0	34.8	35.3	33.5									5
6	48.3	48.3	35.0	40.0	34.8	33.9	33.5	32.4	23.3							6
7	41.4	41.0	35.0	38.0	34.8	31.6	31.9	29.7	21.9	25.4						7
8	35.0	35.0	35.0	35.0	34.8	29.7	29.5	27.9	20.7	23.3	21.0	16.1	17.3			8
9	28.7	28.0	31.5	27.9	30.6	27.9	27.5	26.7	19.5	21.9	20.1	15.4	17.3	13.1		9
10		24.4	25.6	22.3	24.8	26.4	23.9	25.3	18.4	20.5	19.2	14.8	17.2	13.0	11.4	10
12		16.6	18.5	14.9	17.3	19.9	16.7	18.1	16.7	17.6	17.6	13.6	16.6	12.5	11.4	12
14			13.9	10.8	12.7	14.1	13.2	13.6	15.1	13.1	15.2	12.1	13.7	12.0	11.4	14
16				8.0	9.7	11.0	9.2	11.3	12.5	10.1	11.9	10.8	10.6	10.6	10.3	16
18					7.2	8.8	7.1	8.2	10.1	7.9	9.5	9.8	8.4	9.5	9.1	18
20						7.2	5.9	7.0	8.3	6.7	7.0	8.6	6.8	8.1	7.7	20
22							4.3	5.3	6.9	5.4	5.8	7.2	5.7	6.7	6.8	22
24								4.3	5.8	4.3	5.2	6.1	4.7	5.6	5.6	24
26								3.5	4.9	3.4	4.3	5.1	3.4	4.7	4.2	26
28										2.3	3.6	4.4	2.8	3.9	3.5	28
30										1.8	2.6	3.7	2.2	3.2	2.8	30
32												3.2	1.8	2.3	1.9	32
34													1.3	1.9	1.7	34
36														1.5	1.2	36
38														1.1	0.9	38
40															0.6	40

Notes: The lifting load with a \* followed is available only when additional equipment is used;  
When a load weighing more than 55 t(60 Ust) is lifted, a larger hook block is required for operation.



# LOAD CHARTS

**UNITS: t**  
**ASME B30.5 85%**






	12.4	16.9	21.3	28	
4	12.5	12.1	15.5		4
5	9.8	9.4	9.1	12.9	5
6	7.8	7.4	7.1	10.2	6
7	6.2	5.8	5.5	6.6	7
8	4.8	4.5	4.2	5.3	8
9		3.4	3.2	4.2	9
10		1.8	1.5	2.6	10
12				1.4	12

**UNITS: t**  
**ASME B30.5 85%**



	12.4	16.9	21.3	28	
4	12	11.5	11.2		4
5	9.3	8.9	8.6	9.7	5
6	7.3	6.9	6.6	7.7	6
7	5.8	5.3	5.1	6.1	7
8	4.5	4	3.8	4.8	8
9		2.5	2.8	3.7	9
10				2	10




**UNITS: t**  
**ASME B30.5 85%**



	12.4	16.9	21.3	28	
4	8.6	8.4	8.1	9.3	4
5	6.7	6.2	6	7.1	5
6	5	4.6	4.3	5.4	6
7	3.7	3.3	3	4.1	7
8	2.6	2.3	2	3.1	8
9		1.4	1.1	2.2	9
10				0.9	10



**UNITS: t**  
**ASME B30.5 85%**



	12.4	16.9	21.3	28	
4	8.3	7.9	7.6	8.2	4
5	6.2	5.8	5.5	6.6	5
6	4.6	4.2	3.9	5	6
7	3.3	2.9	2.6	3.7	7
8	2.3	1.9	1.6	2.7	8
9		1.1	0.8	1.9	9
10				0.6	10






# LOAD CHARTS

**UNITS: t**  
**ASME B30.5 85%**



	48+10.5			
	0°	15°	30°	
14	5.5			14
16	5.5	4.5		16
18	5.5	4.5	2.6	18
20	5.5	4.4	2.5	20
22	5.2	4.1	2.4	22
24	4.5	3.8	2.2	24
26	3.8	3.6	2.1	26
28	3.1	3.2	2	28
30	2.5	2.6	2	30
32	2.2	2.1	1.9	32
34	1.8	1.8	1.8	34
36	1.4	1.5	1.5	36
38	1	1.1	1.3	38
40	0.8	1	1.1	40
42	0.6	0.7	0.8	42
44	0.5	0.6	0.7	44
46		0.5	0.5	46

**UNITS: t**  
**ASME B30.5 85%**



	48+17.5			
	0°	15°	30°	
14	2.8			14
16	2.8			16
18	2.8	2.1		18
20	2.8	2		20
22	2.8	1.8	1.1	22
24	2.8	1.7	1.1	24
26	2.7	1.6	0.9	26
28	2.5	1.5	0.9	28
30	2.3	1.3	0.9	30
32	2.1	1.2	0.8	32
34	1.8	1.2	0.8	34
36	1.5	1.1	0.8	36
38	1.2	1.1	0.8	38
40	0.9	1.1	0.8	40
42	0.6	0.9	0.8	42
44	0.5	0.6	0.8	44
46		0.5	0.6	46
48			0.5	48
50			0.5	50




# LOAD CHARTS

**UNITS: t**  
**ASME B30.5 85%**



	48+10.5			
	0°	15°	30°	
14	5.5			14
16	5.5	4.5		16
18	5.5	4.5	2.6	18
20	5.5	4.4	2.5	20
22	5.2	4.1	2.4	22
24	4.5	3.8	2.2	24
26	3.8	3.6	2.1	26
28	3.1	3.2	2	28
30	2.5	2.6	2	30
32	2	2.1	1.8	32
34	1.6	1.6	1.7	34
36	1.2	1.3	1.4	36
38	0.9	1	1.2	38
40	0.7	0.8	0.9	40
42	0.5	0.5	0.6	42
44			0.5	44




**UNITS: t**  
**ASME B30.5 85%**



	48+17.5			
	0°	15°	30°	
14	2.8			14
16	2.8			16
18	2.8	2.1		18
20	2.8	2		20
22	2.8	1.8	1.1	22
24	2.8	1.7	1.1	24
26	2.7	1.6	0.9	26
28	2.5	1.5	0.9	28
30	2.3	1.3	0.9	30
32	2	1.1	0.7	32
34	1.6	1.1	0.7	34
36	1.3	1	0.7	36
38	1	1	0.7	38
40	0.7	0.9	0.7	40
42	0.5	0.7	0.7	42
44		0.5	0.6	44
46			0.5	46

# LOAD CHARTS

**UNITS: lb**  
**ASME B30.5 85%**






	40.7	55.4	62.6	69.9	77.1	84.6	91.8	99.1	106.3	113.8	121	128.2	135.5	143	157.4	
8.2	200000*															8.2
9.8	176368*	139551														9.8
11.5	165345	139551														11.5
13.1	159613	139551	77381	101412												13.1
16.4	127646	127646	77161	99207	76720	77822	73854									16.4
19.7	106482	106482	77161	88184	76720	74736	73854	71429	51367							19.7
23.0	91270	90389	77161	83775	76720	69665	70327	65477	48281	55997						23.0
26.2	77161	77161	77161	80247	76720	65477	65036	61508	45635	51367	46297	35494	38140			26.2
29.5	63492	61729	73193	65036	71209	61508	60627	58863	42990	48281	44312	33951	38140	28880		29.5
32.8		55115	59524	52249	57761	58201	55776	55776	40565	45194	42328	32628	37919	28660	25132	32.8
39.4		37478	43431	35494	41887	46297	42108	42328	36817	40344	38801	29983	36596	27558	25132	39.4
45.9		22266	32849	26455	31305	32849	31085	34392	33289	30864	35494	26676	31746	26455	25132	45.9
52.5			20723	19841	24030	25794	21826	26676	29321	23810	27998	23810	24912	23369	22707	52.5
59.0				11243	18739	20723	16975	19621	23810	20282	22487	21605	20062	20944	20062	59.0
65.6					11464	16755	14330	16755	19621	16094	16535	19621	17416	17857	16975	65.6
72.2						11243	10803	12787	16314	13007	13889	16975	13669	15873	14991	72.2
78.7							5512	10582	13889	10141	12566	14330	11243	13228	12346	78.7
85.3								8598	11684	8157	10582	12346	8377	11243	10362	85.3
91.8										5732	8818	10582	7055	9480	8598	91.8
98.4										4409	6614	9039	5512	7937	7055	98.4
105.0												7716	4409	5952	5071	105.0
111.5													3527	4850	4189	111.5
118.1														3748	3086	118.1
124.6														3086	2205	124.6
131.2															1764	131.2

Notes: The lifting load with a \* followed is available only when additional equipment is used;  
When a load weighing more than 55 t(60 Ust) is lifted, a larger hook block is required for operation.

# ROUGH TERRAIN CRANE XCR100\_U

Reach That Matters

**UNITS: lb**  
**ASME B30.5 85%**







	40.7	55.4	62.6	69.9	77.1	84.6	91.8	99.1	106.3	113.8	121	128.2	135.5	143	157.4	
8.2	200000*															8.2
9.8	176368*	139551														9.8
11.5	165345	139551														11.5
13.1	159613	139551	77381	101412												13.1
16.4	127646	127646	77161	99207	76720	77822	73854									16.4
19.7	106482	106482	77161	88184	76720	74736	73854	71429	51367							19.7
23.0	91270	90389	77161	83775	76720	69665	70327	65477	48281	55997						23.0
26.2	77161	77161	77161	77161	76720	65477	65036	61508	45635	51367	46297	35494	38140			26.2
29.5	63272	61729	69445	61508	67461	61508	60627	58863	42990	48281	44312	33951	38140	28880		29.5
32.8		53792	56438	49163	54674	58201	52690	55776	40565	45194	42328	32628	37919	28660	25132	32.8
39.4		36596	40785	32849	38140	43872	36817	39903	36817	38801	38801	29983	36596	27558	25132	39.4
45.9		21385	30644	23810	27998	31085	29101	29983	33289	28880	33510	26676	30203	26455	25132	45.9
52.5			20062	17637	21385	24251	20282	24912	27558	22266	26235	23810	23369	23369	22707	52.5
59.0				10582	15873	19400	15653	18078	22266	17416	20944	21605	18519	20944	20062	59.0
65.6					11023	15873	13007	15432	18298	14771	15432	18960	14991	17857	16975	65.6
72.2						11023	9480	11684	15212	11905	12787	15873	12566	14771	14991	72.2
78.7							5512	9480	12787	9480	11464	13448	10362	12346	12346	78.7
85.3								7716	10803	7496	9480	11243	7496	10362	9259	85.3
91.8									6614	5071	7937	9700	6173	8598	7716	91.8
98.4										3968	5732	8157	4850	7055	6173	98.4
105.0												7055	3968	5071	4189	105.0
111.5													2866	4189	3748	111.5
118.1														3307	2646	118.1
124.6														2425	1984	124.6
131.2															1323	131.2

Notes: The lifting load with a \* followed is available only when additional equipment is used;  
When a load weighing more than 55 t(60 Ust) is lifted, a larger hook block is required for operation.





# LOAD CHARTS

**UNITS: lb**  
**ASME B30.5 85%**




	40.7	55.4	69.9	91.8	
13.1	27558	26676	34171	□	13.1
16.4	21605	20723	20062	28439	16.4
19.7	17196	16314	15653	22487	19.7
23.0	13669	12787	12125	14550	23.0
26.2	10582	9921	9259	11684	26.2
29.5		7496	7055	9259	29.5
32.8		3968	3307	5732	32.8
39.4				3086	39.4



**UNITS: lb**  
**ASME B30.5 85%**



	40.7	55.4	69.9	91.8	
13.1	26455	25353	24692		13.1
16.4	20503	19621	18960	21385	16.4
19.7	16094	15212	14550	16975	19.7
23.0	12787	11684	11243	13448	23.0
26.2	9921	8818	8377	10582	26.2
29.5		5512	6173	8157	29.5
32.8				4409	32.8



**UNITS: lb**  
**ASME B30.5 85%**



	40.7	55.4	69.9	91.8	
13.1	18960	18519	17857	20503	13.1
16.4	14771	13669	13228	15653	16.4
19.7	11023	10141	9480	11905	19.7
23.0	8157	7275	6614	9039	23.0
26.2	5732	5071	4409	6834	26.2
29.5		3086	2425	4850	29.5
32.8				1984	32.8



**UNITS: lb**  
**ASME B30.5 85%**



	40.7	55.4	69.9	91.8	
13.1	18298	17416	16755	18078	13.1
16.4	13669	12787	12125	14550	16.4
19.7	10141	9259	8598	11023	19.7
23.0	7275	6393	5732	8157	23.0
26.2	5071	4189	3527	5952	26.2
29.5		2425	1764	4189	29.5
32.8				1323	32.8

# LOAD CHARTS

**UNITS: lb**  
**ASME B30.5 85%**





	157.4+ 34.4			
	0°	15°	30°	
45.9	12125			45.9
52.5	12125	9921		52.5
59	12125	9921	5732	59
65.6	12125	9700	5512	65.6
72.2	11464	9039	5291	72.2
78.7	9921	8377	4850	78.7
85.3	8377	7937	4630	85.3
91.8	6834	7055	4409	91.8
98.4	5512	5732	4409	98.4
105	4850	4630	4189	105
111.5	3968	3968	3968	111.5
118.1	3086	3307	3307	118.1
124.6	2205	2425	2866	124.6
131.2	1764	2205	2425	131.2
137.8	1323	1543	1764	137.8
144.3	1102	1323	1543	144.3
150.9		1102	1102	150.9

ROUGH TERRAIN CRANE **XCR100\_U**

Reach That Matters



**UNITS: lb**  
**ASME B30.5 85%**



	157.4+ 57.4			
	0°	15°	30°	
45.9	6173			45.9
52.5	6173			52.5
59	6173	4630		59
65.6	6173	4409		65.6
72.2	6173	3968	2425	72.2
78.7	6173	3748	2425	78.7
85.3	5952	3527	1984	85.3
91.8	5512	3307	1984	91.8
98.4	5071	2866	1984	98.4
105	4630	2646	1764	105
111.5	3968	2646	1764	111.5
118.1	3307	2425	1764	118.1
124.6	2646	2425	1764	124.6
131.2	1984	2425	1764	131.2
137.8	1323	1984	1764	137.8
144.3	1102	1323	1764	144.3
150.9		1102	1323	150.9
157.4			1102	157.4
164			1102	164

# LOAD CHARTS

**UNITS: lb**  
**ASME B30.5 85%**



	157.4 ft + 34.4 ft			
	0°	15°	30°	
45.9	12125			45.9
52.5	12125	9921		52.5
59	12125	9921	5732	59
65.6	12125	9700	5512	65.6
72.2	11464	9039	5291	72.2
78.7	9921	8377	4850	78.7
85.3	8377	7937	4630	85.3
91.8	6834	7055	4409	91.8
98.4	5512	5732	4409	98.4
105	4409	4630	3968	105
111.5	3527	3527	3748	111.5
118.1	2646	2866	3086	118.1
124.6	1984	2205	2646	124.6
131.2	1543	1764	1984	131.2
137.8	1102	1102	1323	137.8
144.3			1102	144.3

ROUGH TERRAIN CRANE **XCR100\_U**

Reach That Matters

**UNITS: lb**  
**ASME B30.5 85%**



**157.4 ft + 57.4 ft**



	<b>157.4 ft + 57.4 ft</b>			
	<b>0°</b>	<b>15°</b>	<b>30°</b>	
45.9	6173			45.9
52.5	6173			52.5
59	6173	4630		59
65.6	6173	4409		65.6
72.2	6173	3968	2425	72.2
78.7	6173	3748	2425	78.7
85.3	5952	3527	1984	85.3
91.8	5512	3307	1984	91.8
98.4	5071	2866	1984	98.4
105	4409	2425	1543	105
111.5	3527	2425	1543	111.5
118.1	2866	2205	1543	118.1
124.6	2205	2205	1543	124.6
131.2	1543	1984	1543	131.2
137.8	1102	1543	1543	137.8
144.3		1102	1323	144.3
150.9			1102	150.9